


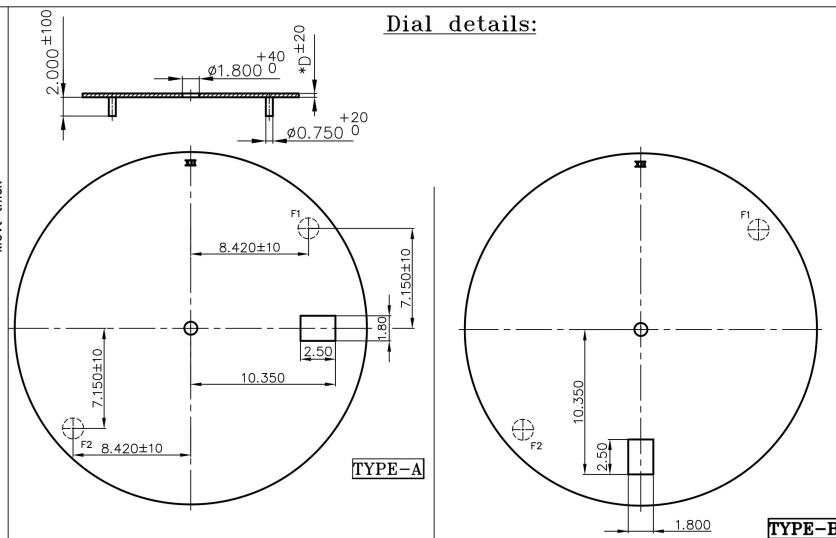


Dial details:


Note : For other details refer "TYPE A"


1. Cal.7021 High is for VGP/VNP dial(D) of 0.400mm thickness and Embossed / Hybrid dial(D) of 0.800mm(max.) thickness.
2. Stem height in case design to be followed according to the dial thickness.

Hand details for STD & Rodalphe versions

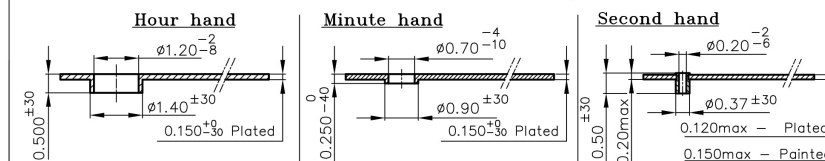

Hand details for High, H2 & H3 versions

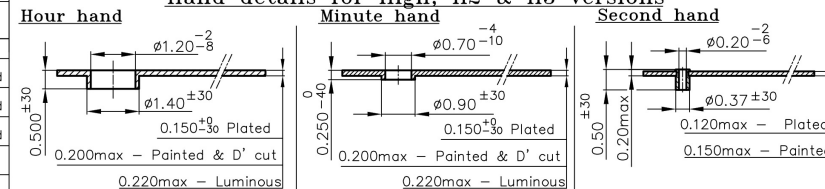

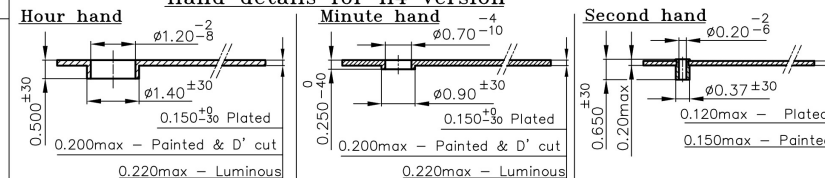Hand details for H4 version

POWER CELL	Type	371 / SR920SW
	Size	Ø7.90 x 2.1 mm
	Voltage	1.55 V
	Capacity	45 mAh
	Life (theoretical)	48 months
	Battery locking	Top clamping

HANDS	DESCRIPTION	MINUTE HAND	SECOND HAND
	Imbalance mg.mm	60	15
	Inertia mg.mm ²	500	250
	Weight mg (max).	12	7
	Length mm (max) Brass	13	13

- 1) All dimensions are in mm.
- 2) Tolerances in μm .
- 3) Clearance MG to SH top increased 0.550, should consider from new case designs
- 4) High3 version to use in place of STD version for using 0.220mm thick hands with good hands clearance

k)	Long stem 25.00mm(28.15" added
j)	Type-L dial opening is added
i)	Type-J&K dial opening is added
h)	Type-E dial opening is added
g)	6h date window round opening added
f)	Stem dim details added
e)	In Type B Taper window angle 48° at 3H with offset center 5mm was 18°
Index	Alterations


Index	Alterations		
	Prepared	Checked	Approved
Name			
Date			

T-2428	n)
--------	----




TECHNICAL DATA FOR Cal.7121


Note : For other details refer "TYPE A"

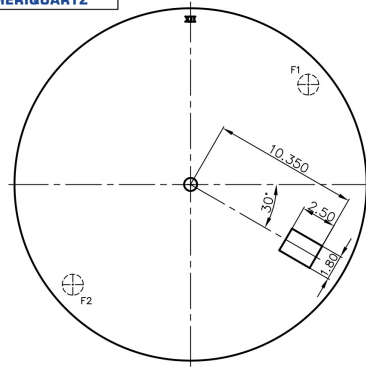


TYPE-C

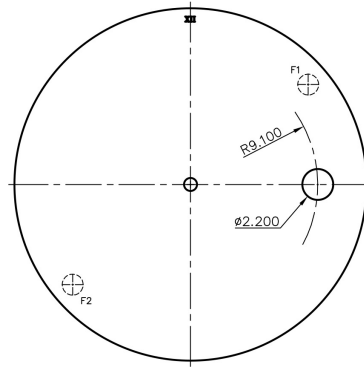


TYPE-D

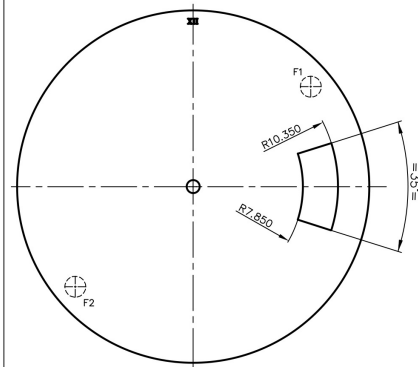


TYPE-E

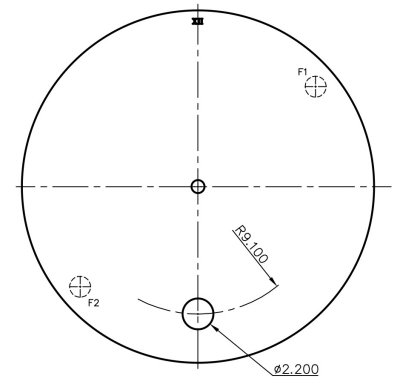


TYPE-F
TYPE-J

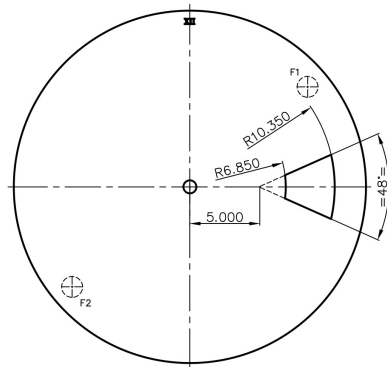





TYPE-G
TYPE-K

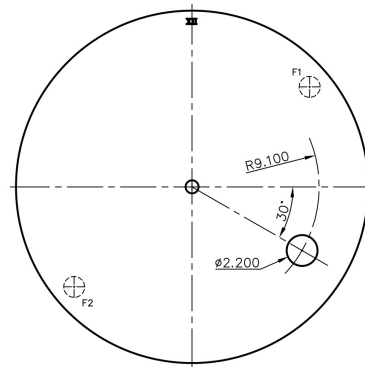

TYPE-H
TYPE-L

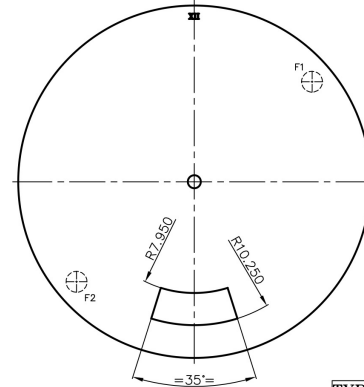

TYPE-I
TYPE-M

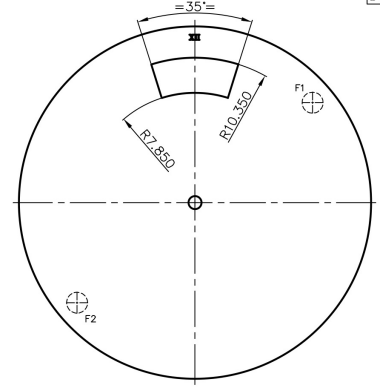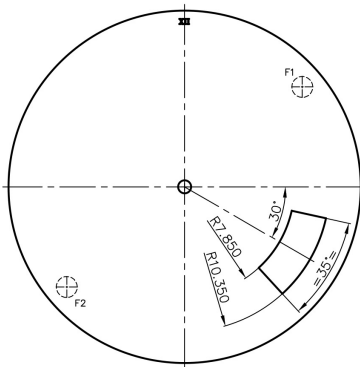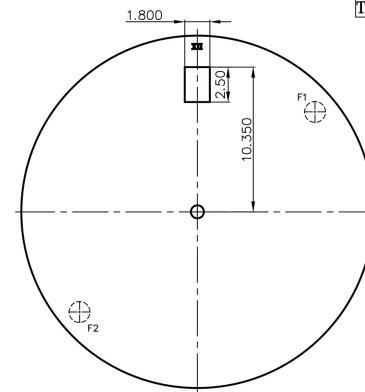
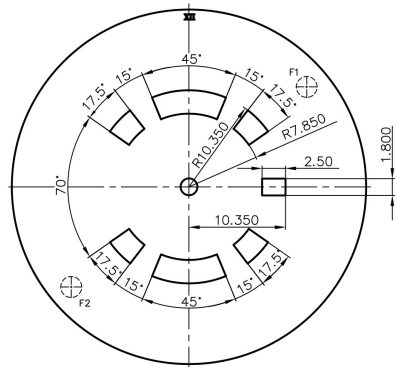


n)	H4 version added
m)	Movt thick 3.10 +100/+0 was 3.00mm; Hands details updated; Clearance MG to SH top 0.550 was 0.500; High3 version added to replace STD version; High version Tech data T2517(i) merged to T2428
L)	Type-M dial opening is added
Index	Alterations


Name	Prepared	Checked	Approved
Date			

T-2428 n)

Dial details: Ameriquartz cal. 7121

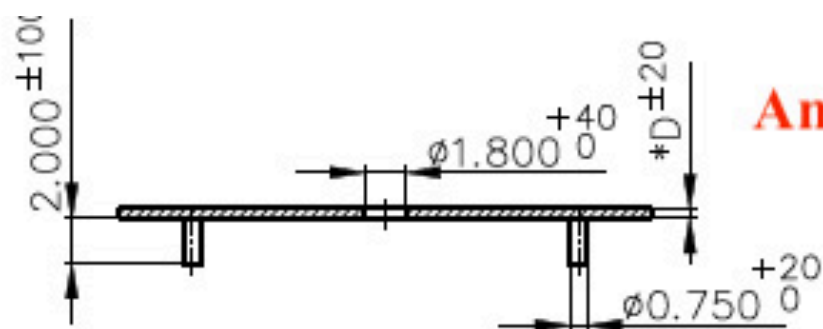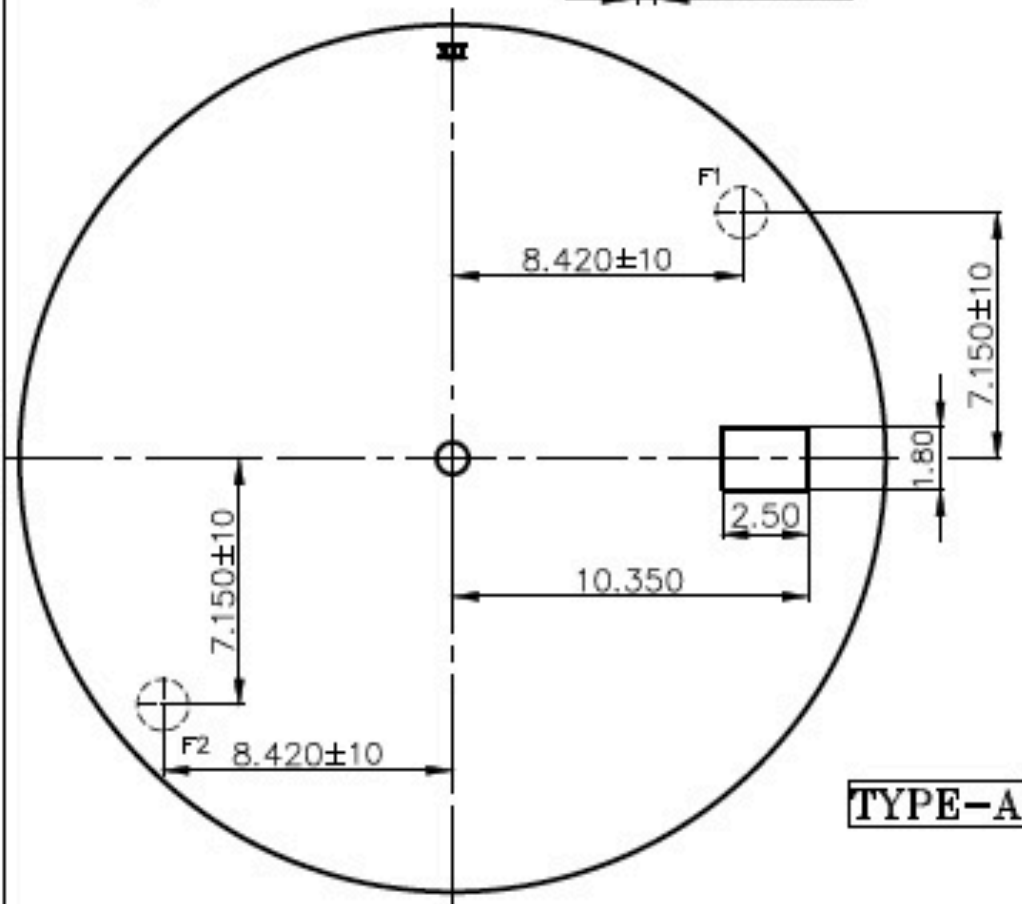

TYPE-A

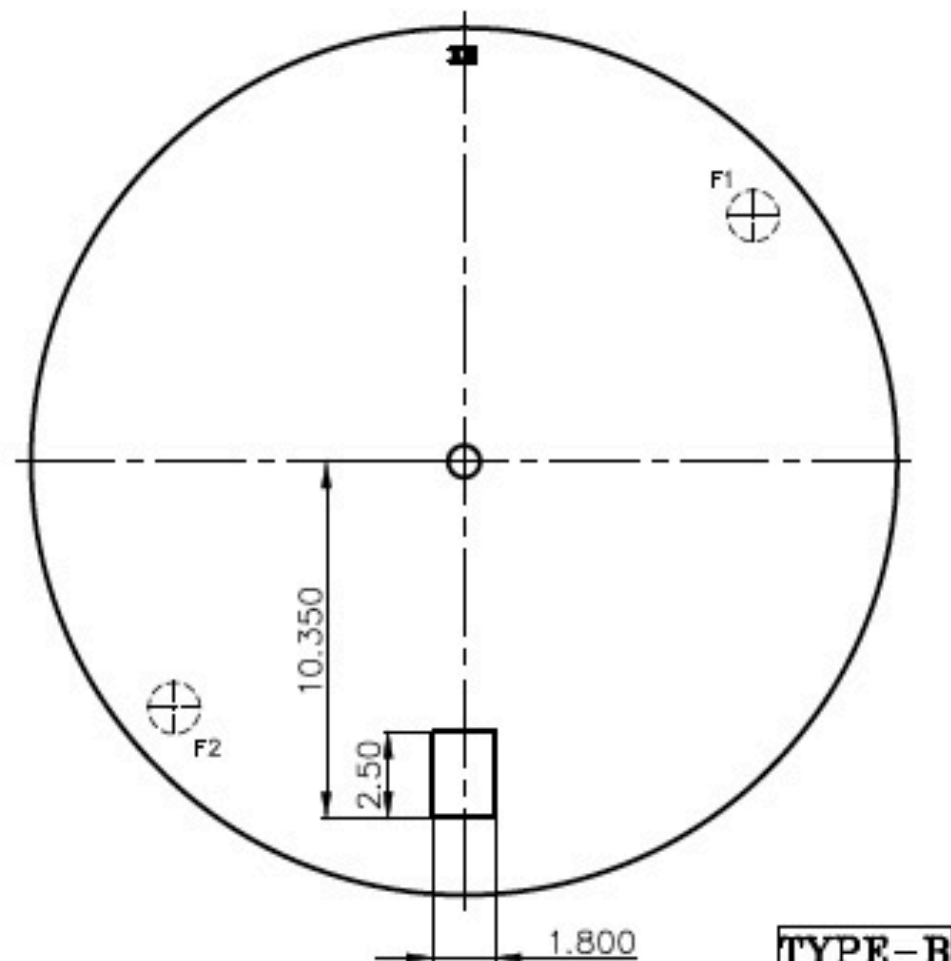

TYPE-B

*NOTE:

1. Cal. 7021 High is for VGP/VNP dial(D) of 0.400mm thickness and Embossed / Hybrid dial(D) of 0.800mm(max.) thickness.
2. Stem height in case design to be followed according to the dial thickness.

Note : For other details refer "TYPE A"